


0.			1
1.	IP		1
2.	dat		2
3.			2

cEIP

× cEIP

1. PowerFlasher

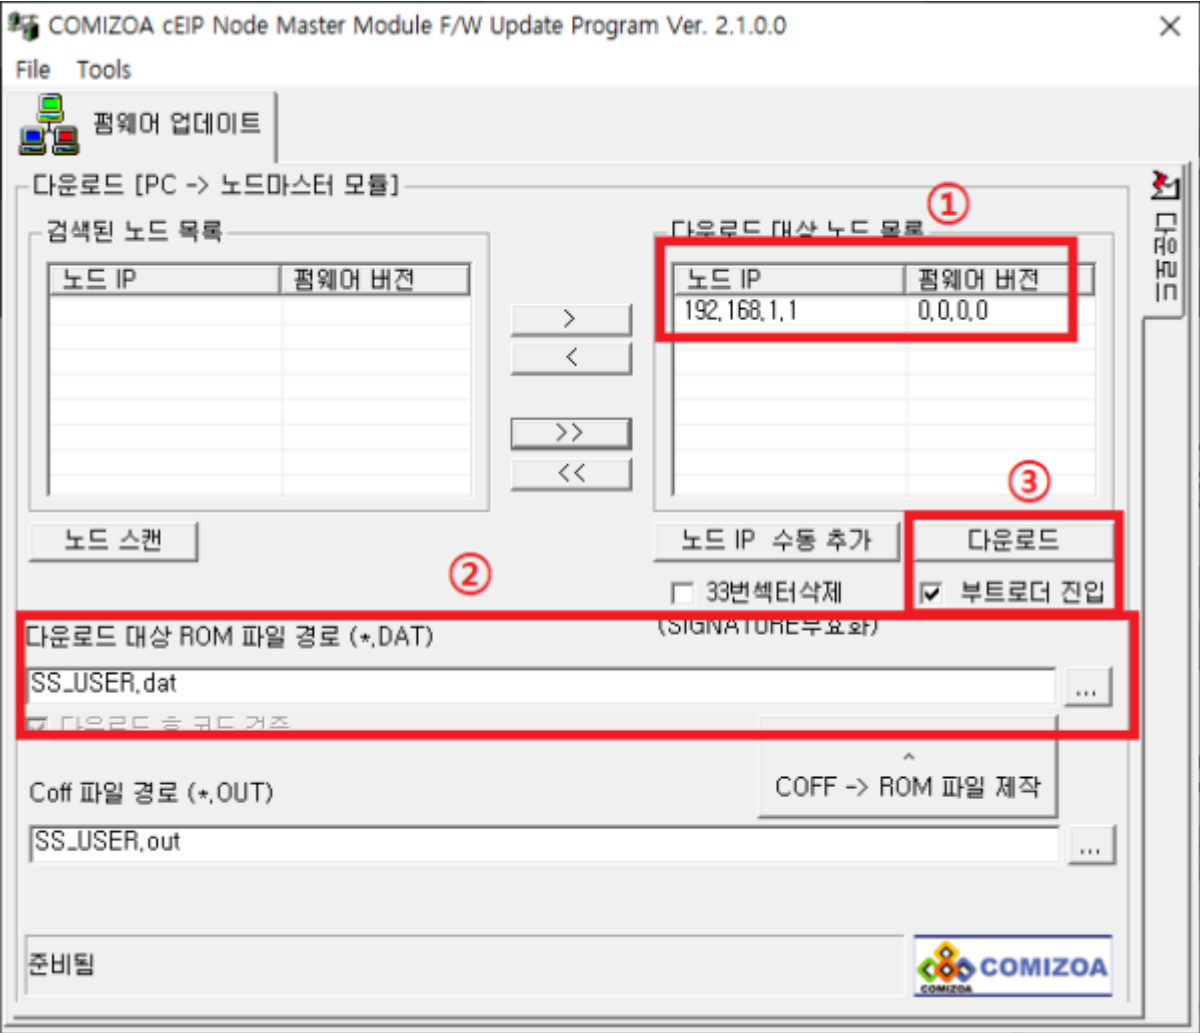

×

•

CEIP

0.

• cEIP

c6711PowerFlasher.exe

1)

• PowerFlasher가

PC cEIP

Ethernet²⁾

1. IP

• cEIP

IP

3)

- 192.169.1.1 .

2. **dat**

- PowerFlasher.exe SS_USER.dat .
- FW

3.

- . 4)5)
- . 6) 가 , 가

×

- .
- 가 ping 가 .

2. Firmware Reset



'MSB:0xF','LSB:0xF' 가 가 가

```
1. IP                                0xF,0xF
2.      가
3.      5
4.      (                ex.MSB:0x0, LSB:0x1 -> 192.168.1.1)
5.      (                가 )
6. Act LED, Err LED                500ms                (      가
    Act LED    500ms                )
```

- 1)
cEIP Core PC .
- 2)
RJ-45
- 3)
cEIP .
2. Firmware Reset
- 4)
- 5)

Act LED 500ms , Act,Err LED가 500ms
- 6)

가 가 가

From:
<http://comizoa.co.kr/info/> - -

Permanent link:
http://comizoa.co.kr/info/doku.php?id=faq:comiapp:fwupdater:02_ceip&rev=1628569299

Last update: **2024/07/08 18:22**