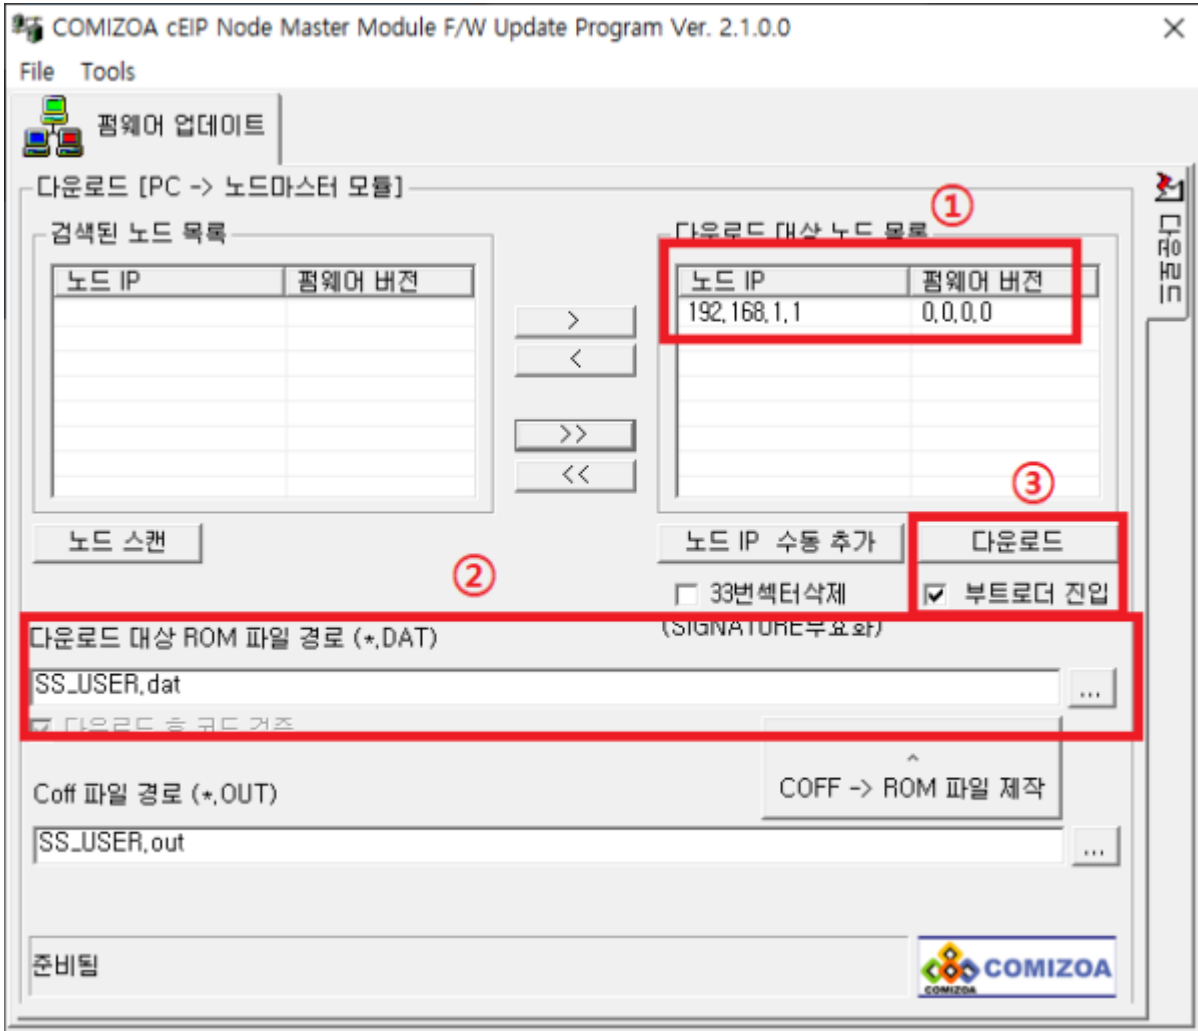

0.		1
1.	IP	1
2.		dat 	2
3.		2

cEIP

/

× cEIP



×

CEIP

0.

- cEIP c6711PowerFlasher.exe ¹⁾
- PowerFlasher가 PC cEIP Ethernet²⁾

1. IP

- cEIP IP ³⁾

- 192.169.1.1 .

2. **dat**

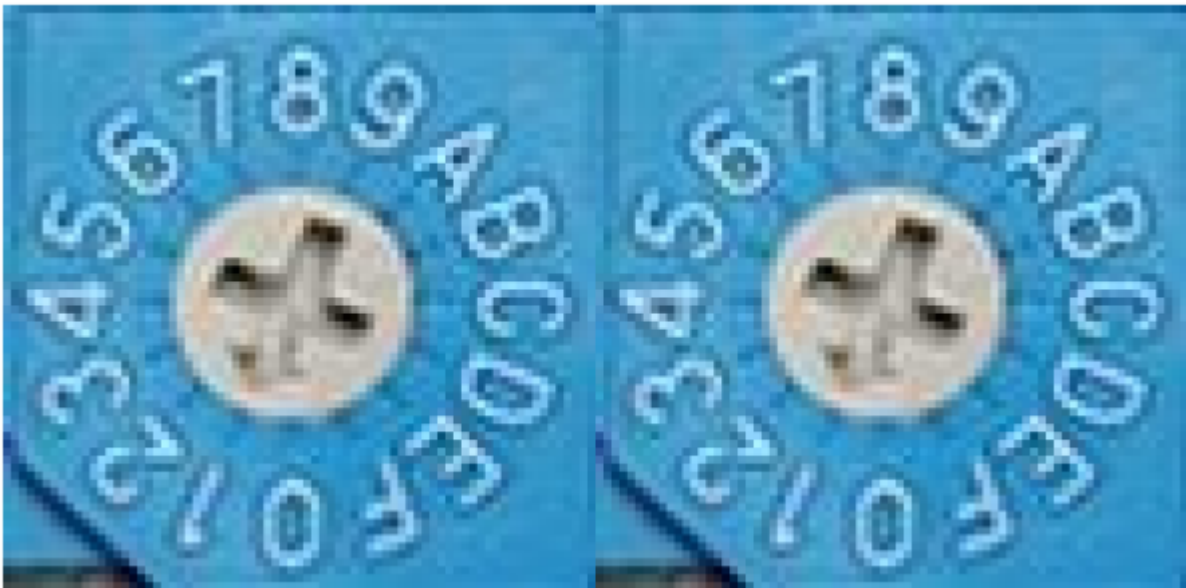
- PowerFlasher.exe SS_USER.dat .
- FW

3.

- ⁴⁾⁵⁾ .
- ⁶⁾ 가 , 가

×

-
- 가 ping 가 .



'MSB:0xF,'LSB:0xF' 가 . 가 가 . 가

- 1. IP 0xF, 0xF
- 2. 가
- 3. 5
- 4. (ex.MSB:0x0, LSB:0x1 -> 192.168.1.1)
- 5. (가)
- 6. Act LED, Err LED 500ms (가)
Act LED 500ms)

- 1) cEIP Core PC .
- 2) RJ-45
- 3) cEIP .
- 2. Firmware Reset
- 4)
- 5) Act LED 500ms , Act,Err LED가 500ms
- 6) 가 가 가

From:
<http://comizoa.co.kr/info/> - -

Permanent link:
http://comizoa.co.kr/info/doku.php?id=faq:comiapp:fwupdater:02_ceip&rev=1628569381

Last update: **2024/07/08 18:22**