



Daemon 1
 Daemon 1
 1
 Daemon 2
 Slave Info. 3
 Network Config. 4

Daemon


× Daemon

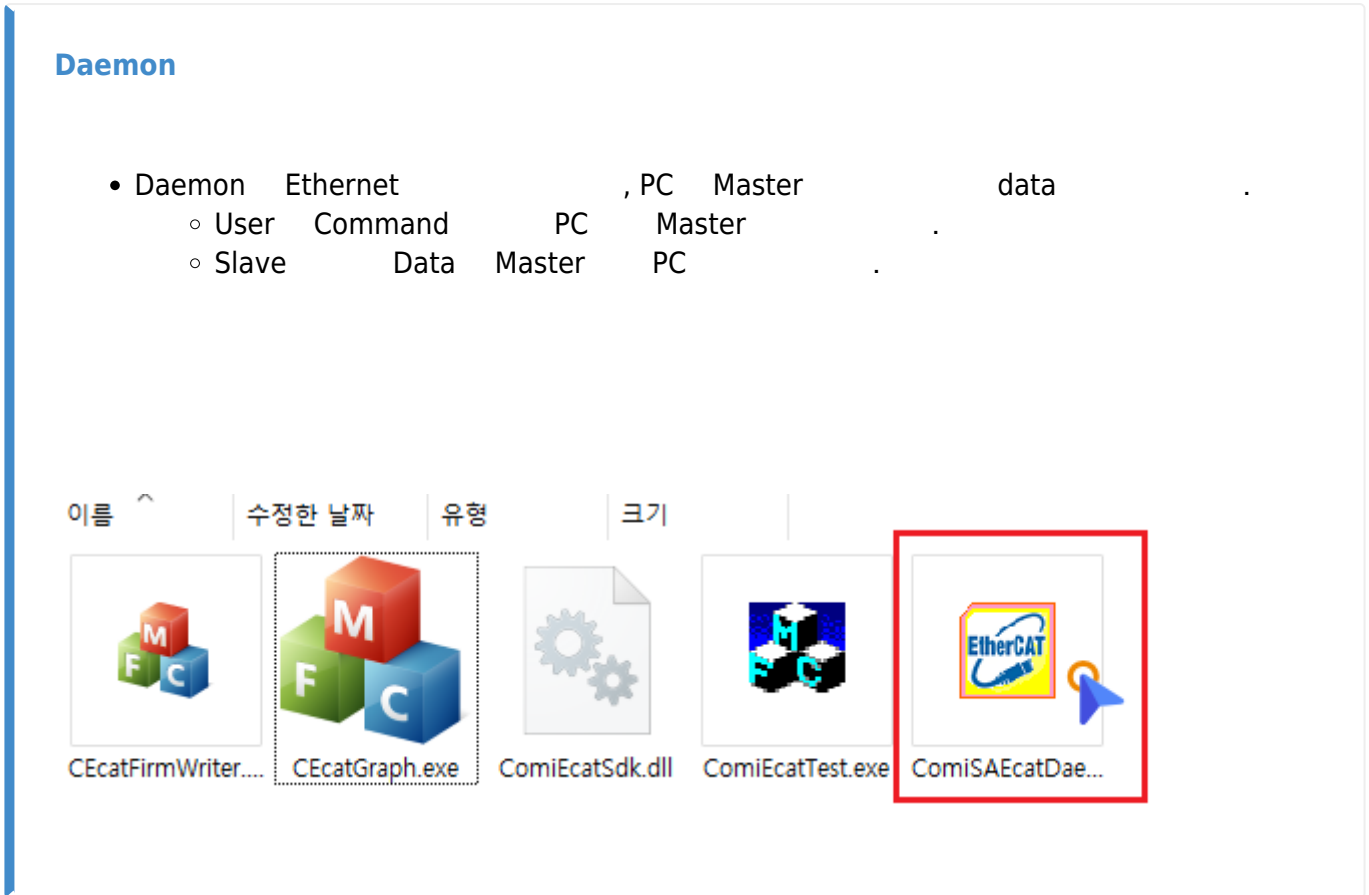

• ComiSAEcatDaemon.exe

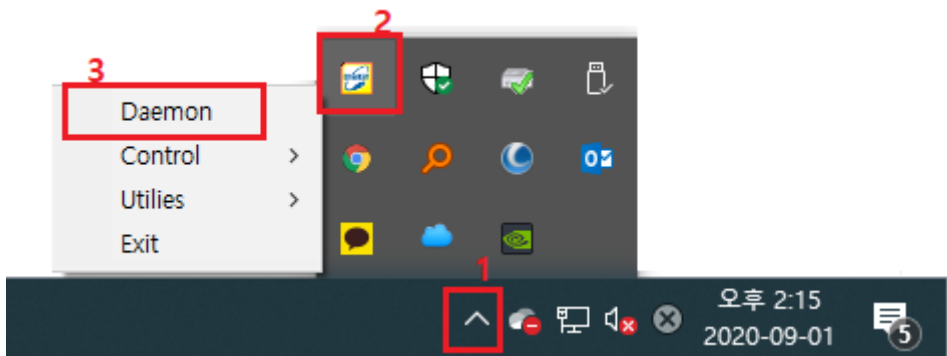

- Tray
 - Tray **Daemon**

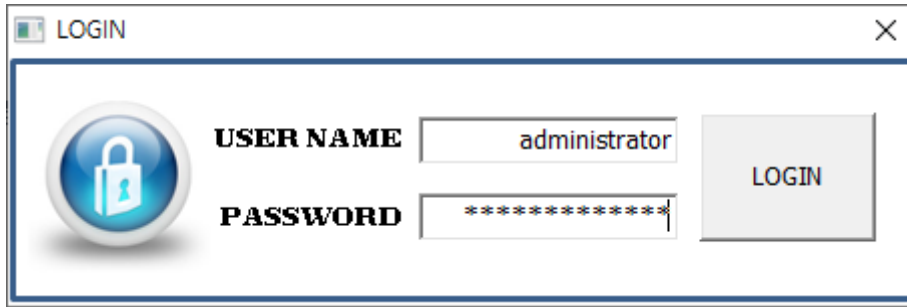

- ID Password 'administrator' .


Daemon

ID	NAME	Phy. A...	AlStatus	RX Error	OutPDO	InPDO
00	LX558	[192.168.1.101]				


Name	Value
Heartbeat Process Time	909 usec
Core0 Cycle Process Time	40 usec
Core1 Cycle Process Time	9 usec
MainTaskProcessTime	19 usec
Task_IPC_MastCmdAns	1468 usec
Task_M2ASyncCmdRcv	22 usec
Ctrl Msg Process Time D/M	0 / 9 usec
IO Msg Process Time D/M	8 / 180 usec
Ctrl PDO Size	0 Bytes

[2020-09-01 14:13:54:031] [192.168.1.49] All Server Sockets Started.
[2020-09-01 14:13:54:005] Network Adapter 01(192.168.1.49) is is waiting for Standalone EtherCAT Master.
[2020-09-01 14:13:55:387] [192.168.1.101:34835] Master Device Connected


- 가 , Device List Master .

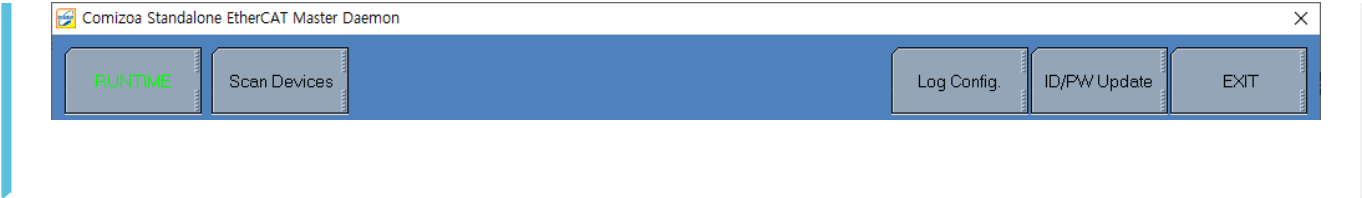


- **RUNTIME** : 'Simulation Mode'
 - , 'Simulation Mode' 'RunTime Mode'
- **Scan Device** : StandAlone EtherCAT Master
- **Log Config** : Library Logging
 - ComilDE **DLL Logger** 가

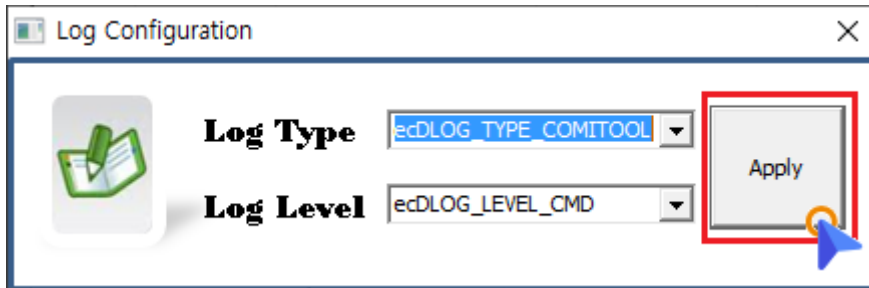

- **IP/PW Update** : ID Password
 - ID Password , Login

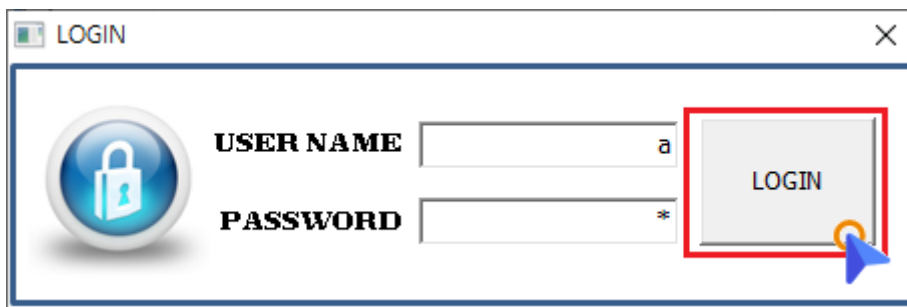

- **EXIT** : Daemon

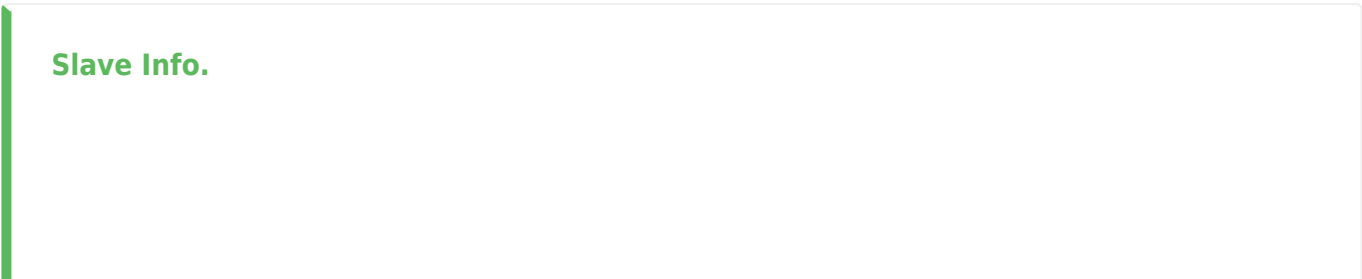

ID	NAME	Phy. A...	AIStatus	RX Error	OutPDO	InPDO
1	0x5132aa00	0x200	0x8	0x0		
2	0x5032da11	0x204	0x8	0x0	00	00 04

- Master
- Slave

Configuration

Network Config.

DeviceID / DeviceIP

Slaves Info. **Network Config.**


Connected Device List **Set Device Address**

Index	Device Id	IP Address	Ctrl. Msg. Port	IO Msg. In Port	IO Msg. Out Port	IO Msg. Frame ...
1	0	192.168.1.101	34835	35040	35041	286

Daemon Network Configuration

Local IP Address	<input type="text" value="192 . 168 . 1 . 49"/>	Start Library Server	Stop Library Server
Library Server Port	<input type="text" value="55000"/>		
Master Server Port	<input type="text" value="5000"/>	Start Master Server	Stop Master Server
IO Msg. In Port	<input type="text" value="35040"/>		
IO Msg. Out Port	<input type="text" value="35041"/>		

- **Network Config.** **Set Device Address**

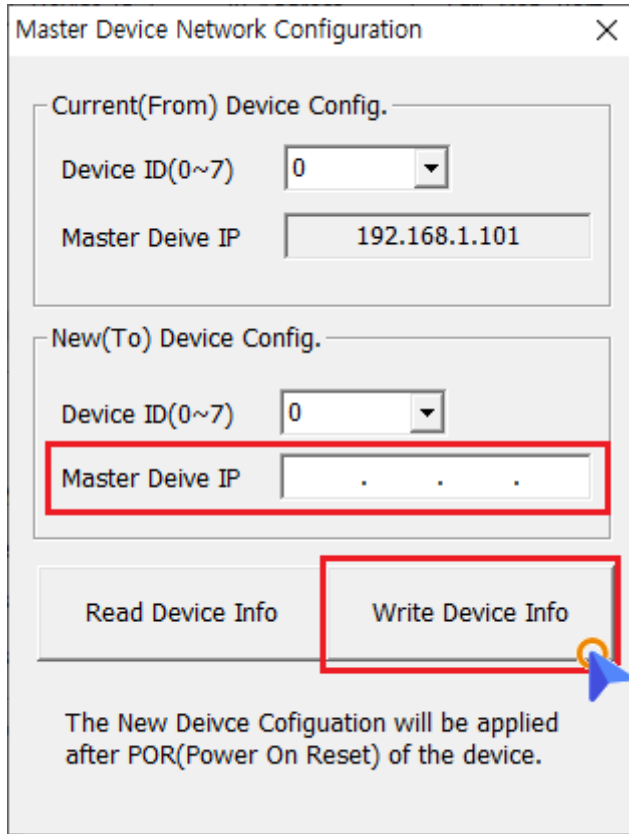

- **New(To) Device Config. Info**
 - Device ID 'Device ID' , Master
 - Device IP가 'Master Device IP' , **Write Device Info**

From:
<http://comizoa.co.kr/info/> - -

Permanent link:
http://comizoa.co.kr/info/doku.php?id=platform:ethercat:1_setup:20_ip:20_daemon

Last update: **2024/07/08 18:23**