



Daemon 1
 Daemon 1
 1
 Daemon 2
 Slave Info. 3
 Network Config. 4

Daemon


× Daemon

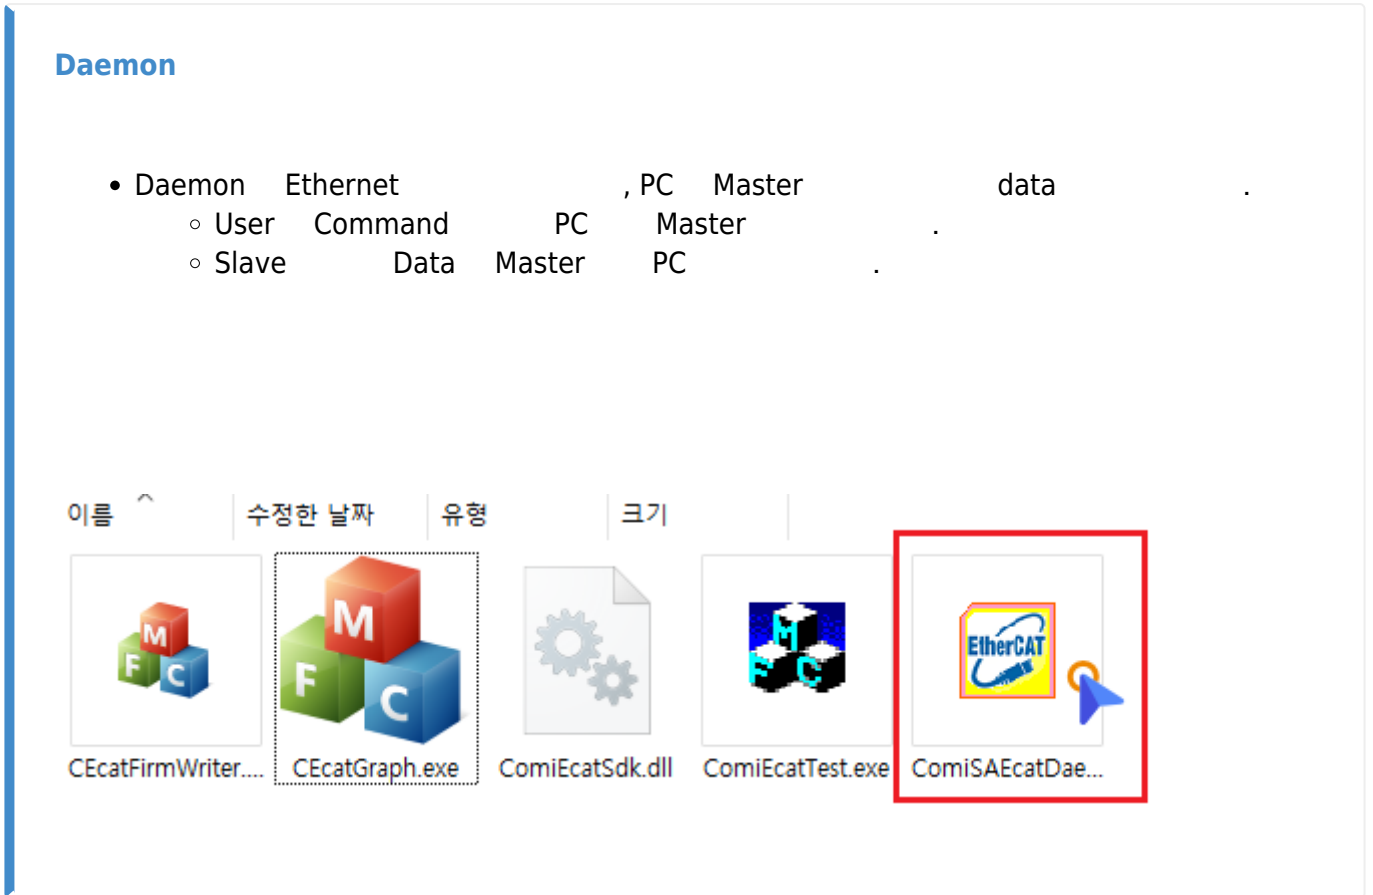


• ComiSAEcatDaemon.exe

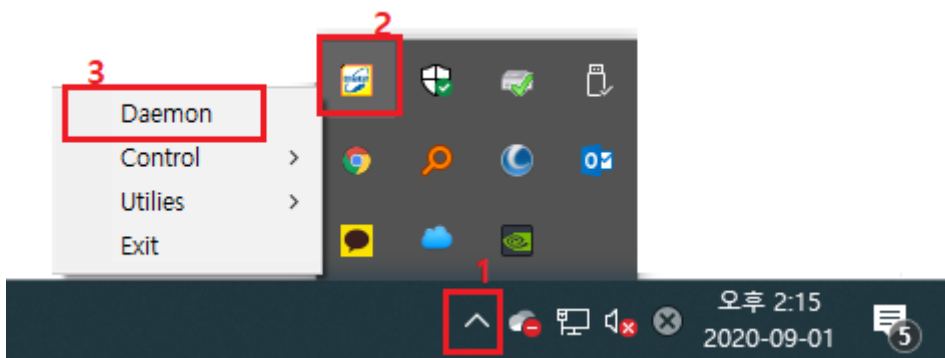


- Tray
 - Tray **Daemon**

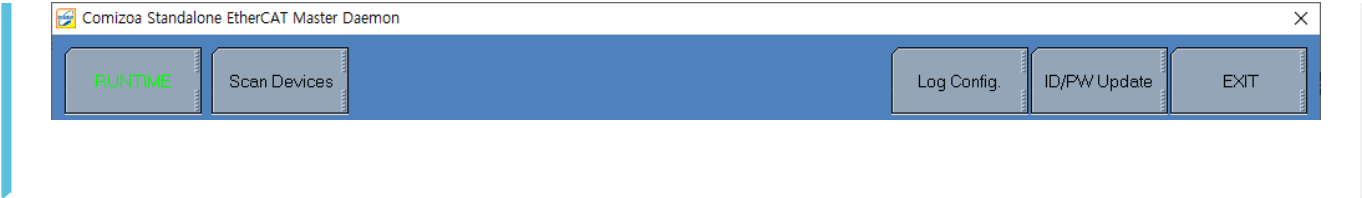


- **RUNTIME** : 'Simulation Mode'
 - , 'Simulation Mode' 'RunTime Mode'
- **Scan Device** : StandAlone EtherCAT Master
- **Log Config** : Library Logging
 - ComilDE **DLL Logger** 가

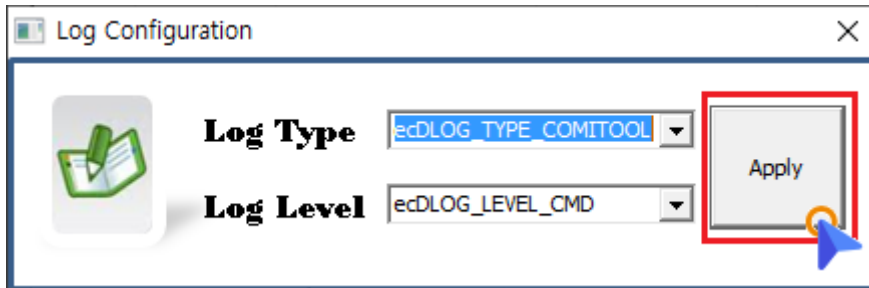

- **IP/PW Update** : ID Password
 - ID Password , Login

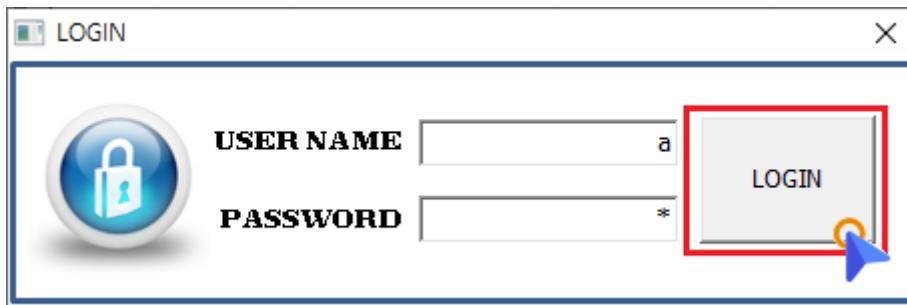

- **EXIT** : Daemon

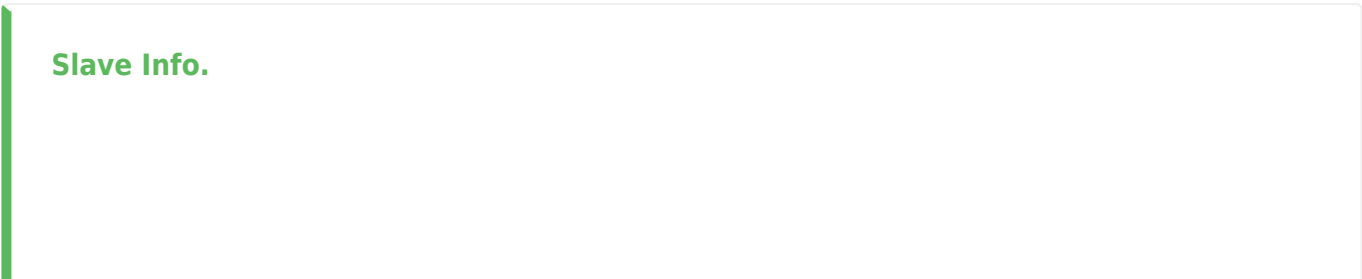

Slaves Info.		Network Config.				
ID	NAME	Phy. A...	AIStatus	RX Error	OutPDO	InPDO
1	0x5132aa00	0x200	0x8	0x0		
2	0x5032da11	0x204	0x8	0x0	00	00 04

- Master
- Slave

Configuration

Network Config.

DeviceID / DeviceIP

Slaves Info. Network Config.


Connected Device List Set Device Address

Index	Device Id	IP Address	Ctrl. Msg. Port	IO Msg. In Port	IO Msg. Out Port	IO Msg. Frame ...
1	0	192.168.1.101	34835	35040	35041	286

Daemon Network Configuration

Local IP Address <input style="width: 100%;" type="text" value="192 . 168 . 1 . 49"/>	<input type="button" value="Start Library Server"/>	<input type="button" value="Stop Library Server"/>
Library Server Port <input style="width: 100%;" type="text" value="55000"/>		
Master Server Port <input style="width: 100%;" type="text" value="5000"/>		
IO Msg. In Port <input style="width: 100%;" type="text" value="35040"/>		
IO Msg. Out Port <input style="width: 100%;" type="text" value="35041"/>	<input type="button" value="Start Master Server"/>	<input type="button" value="Stop Master Server"/>

- **Network Config.** **Set Device Address**

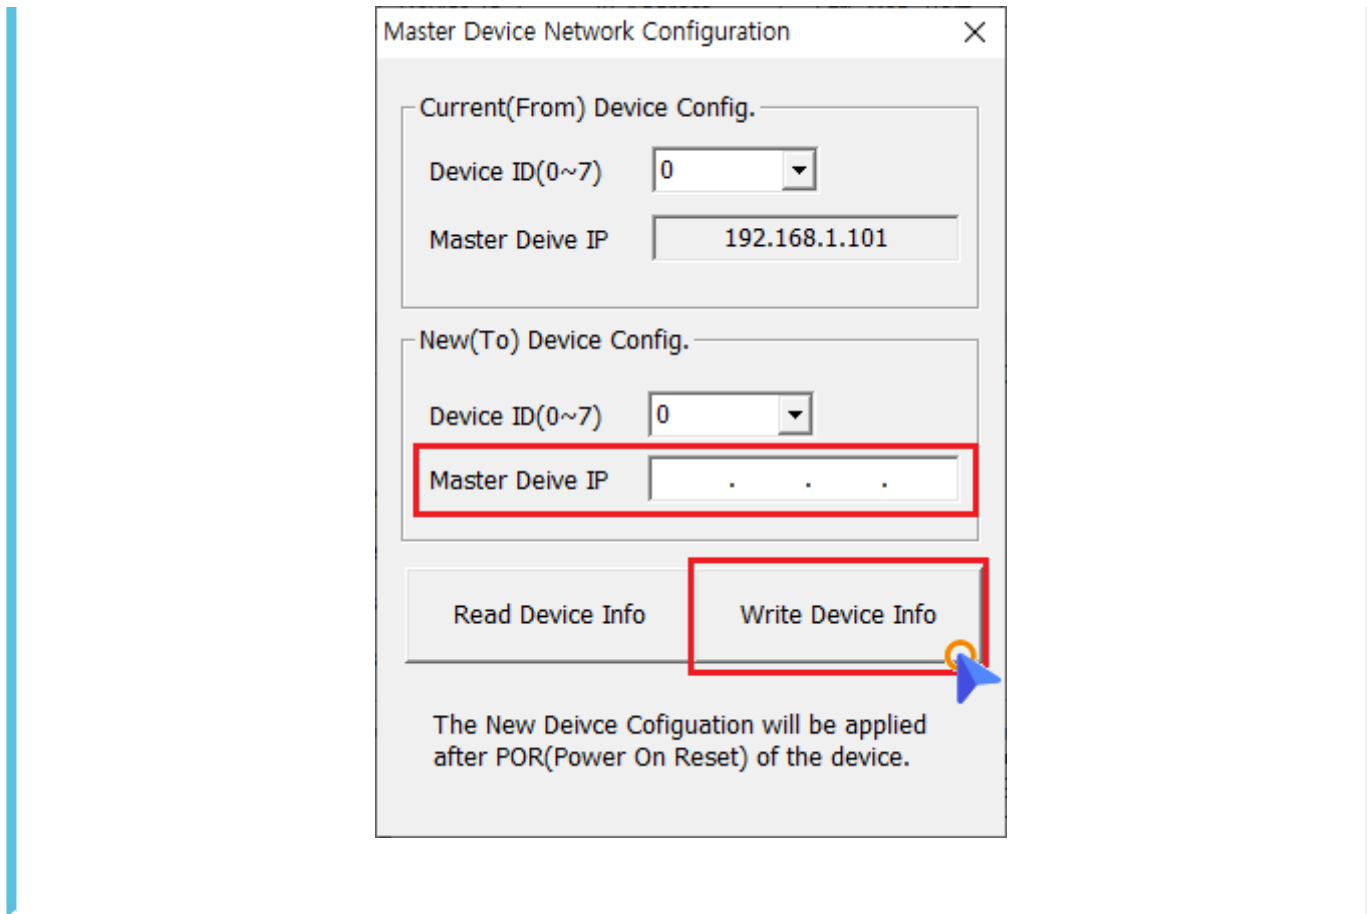

- **New(To) Device Config. Info**
 - Device ID Device IP가 , Master , **Write Device Info**

From:
<http://comizoa.co.kr/info/> - -

Permanent link:
http://comizoa.co.kr/info/doku.php?id=platform:ethercat:1_setup:20_ip:20_daemon&rev=1598957423

Last update: **2024/07/08 18:22**