

..... 1

..... 1

..... 4

DriverIO


x 402 Profile

Driver

Digital Output Signal

- Firmware 1.94
- ComiIDE v1.4.1.0


가 .
가 .

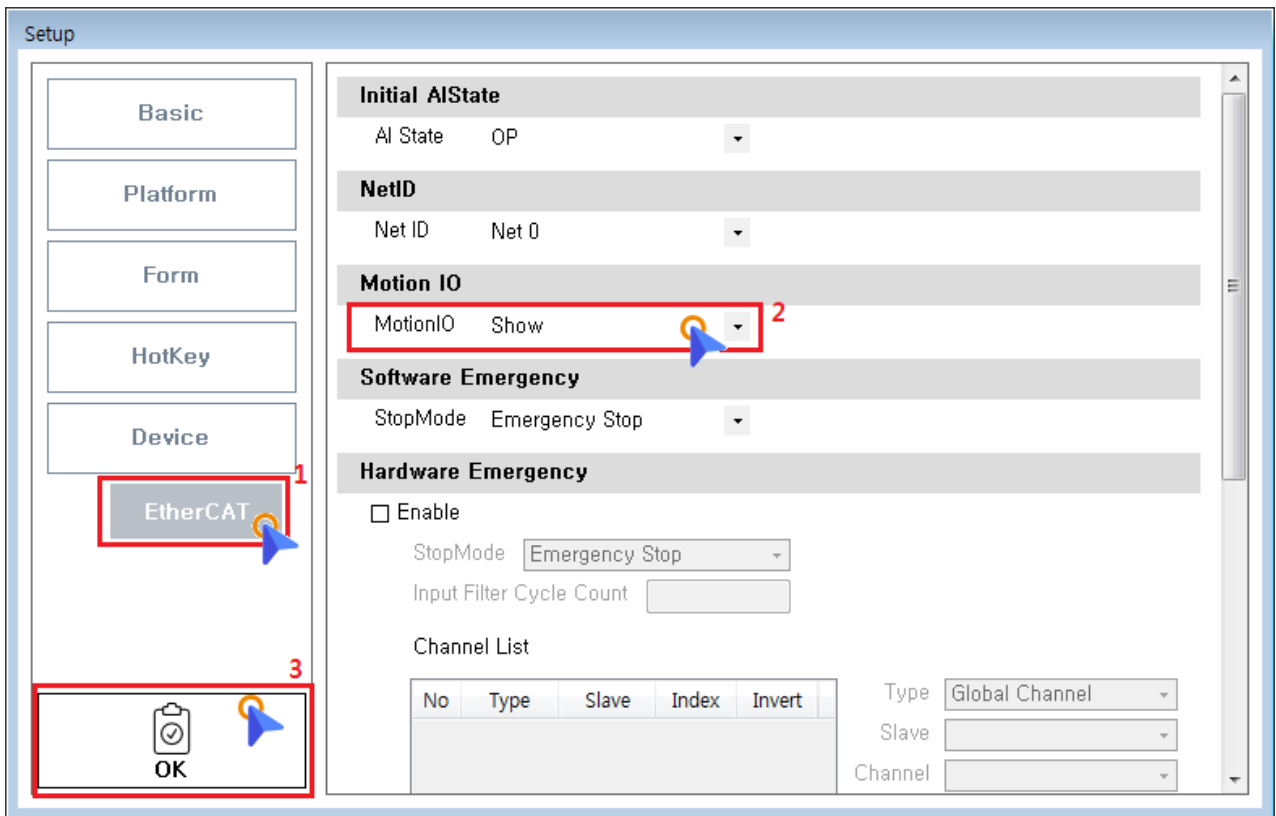


• Menu - EtherCAT Page

MotionIO 'Show'


OK

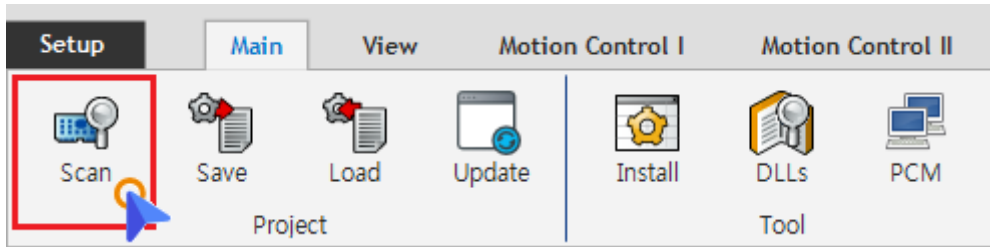


• Scan

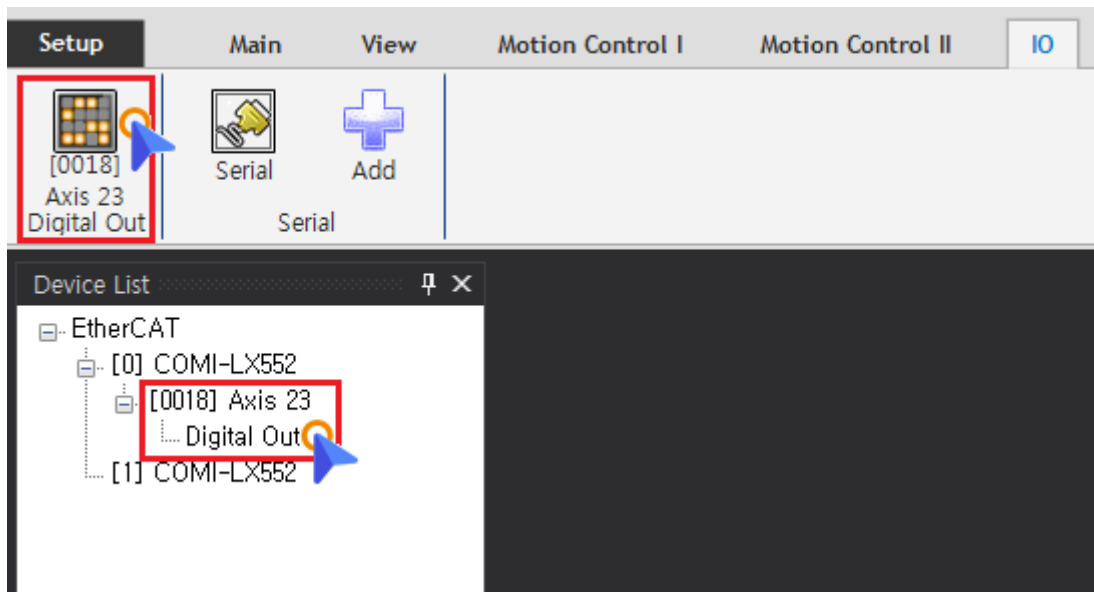


- Device List Axis Axis 'Digital Output'
 - **MotionIO**가 'Hide' , Device List Axis가
- Device List 'Digital Output'
 - **Menu - IO** Axis가 'Digital Output'

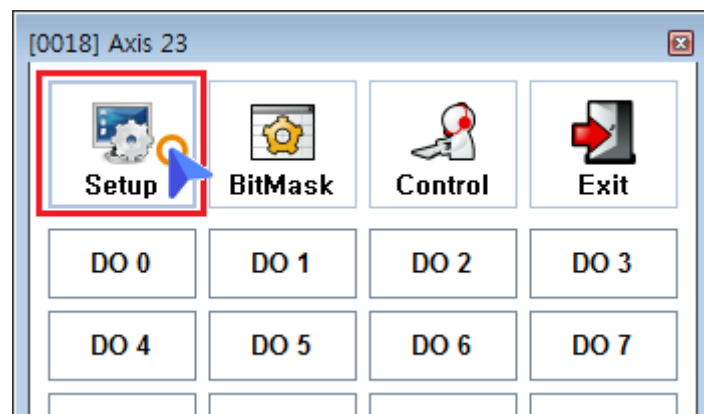

- **Setup**

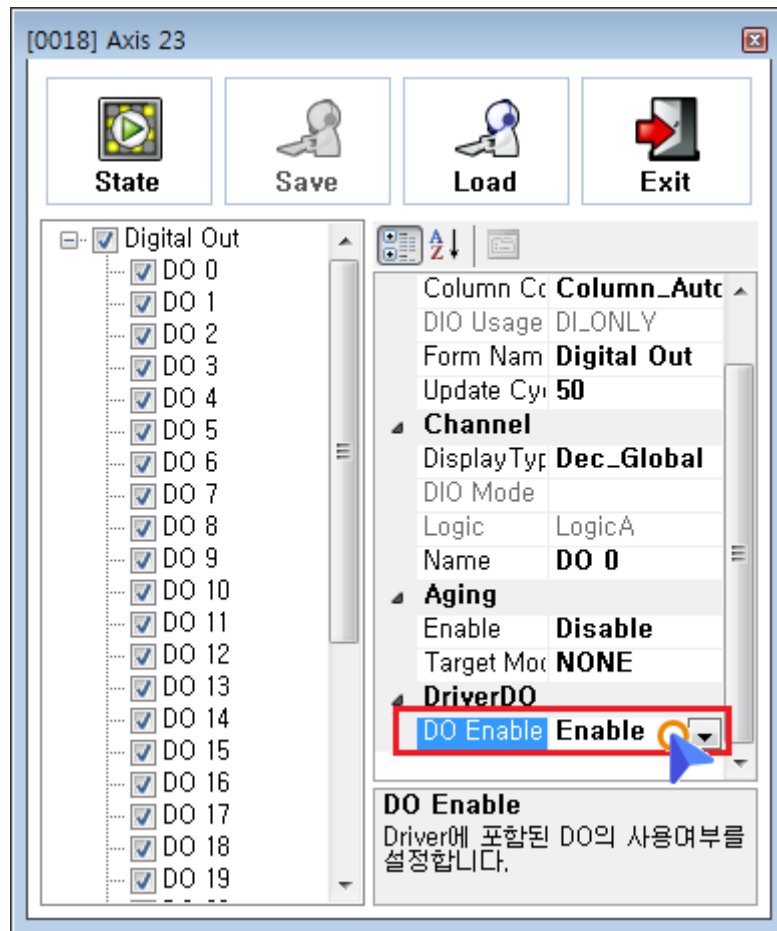

- **DriverDO** **DO Enable** 'Enable'
 - DO Enable BitMask
 -

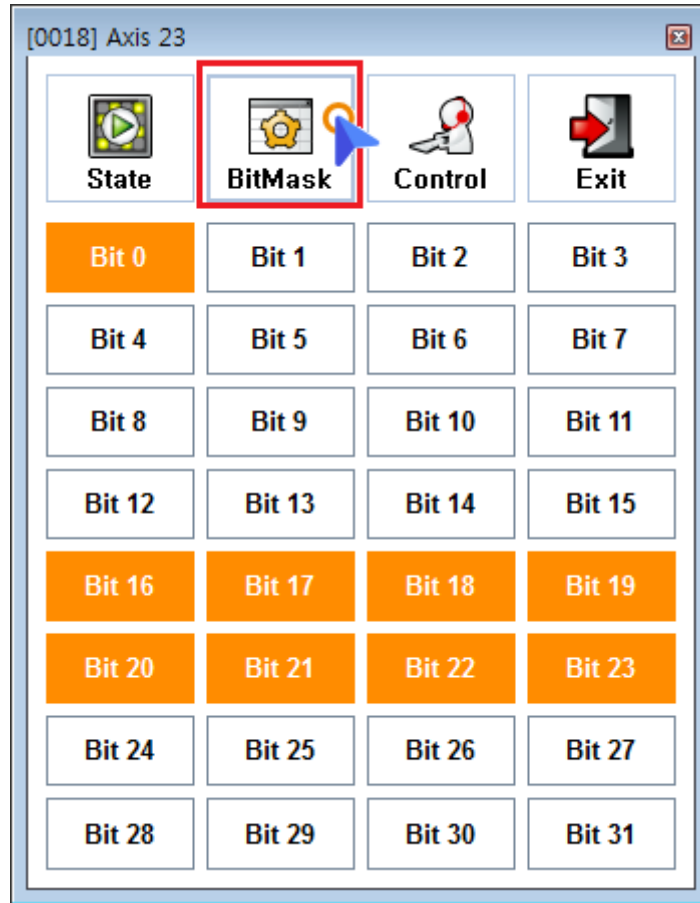

- **BitMask**

- BitMask Bit Enable
 - Bit
 - 가
 - Bit0 Motor Break , Bit16~Bit31

From:
<http://comizoa.co.kr/info/> - -

Permanent link:
http://comizoa.co.kr/info/doku.php?id=platform:ethercat:70_users_guide:10_howto:test_driverio&rev=1588051073

Last update: **2024/07/08 18:22**