

Intro	1
COMMAND (CW & CCW)	1
Info	1
Command	1
Command	2
Feedback (EA, EB, EZ)	5
Info	5
Encoder	5

Command & Feedback

× Command() Feedback() .

Intro

- Command() Feedback() 가
Command , Feedback .
- Command , Feedback .
Feedback .

COMMAND (CW & CCW)

Info



- Command .
- Command CW CCW
OUT/DIR CW/CCW .
- DC/AC .
- OUT/DIR CW CCW (Low/High)
- CW/CCW CW CCW 가
LOW HIGH , ,
- 0 3 OUT/DIR
4 , 5 CW/CCW .
- CW/CCW OUT/DIR Command
(Command Pulse) , 가

Command


- 가 , **Application I/O Setup**
cmmCfgSetOutMode() .

6가

Pulse & Direction Mode

Value	출력 형태			
	(+) 방향 운전 시		(-) 방향 운전 시	
	CW pin	CCW pin	CW pin	CCW pin
0		(Low)		(High)
1		(Low)		(High)
2		(High)		(Low)
3		(High)		(Low)

CW & CCW Mode


Value	출력 형태			
	(+) 방향 운전 시		(-) 방향 운전 시	
	CW pin	CCW pin	CW pin	CCW pin
4		(Low)	(Low)	
5		(High)	(High)	

Command


- CW CCW (Line Drive) (Open Collector) 가
- 가

Line Drive

- Line Drive (AMP) ,
Shielded Twisted pair type
- CW/CCW Line Drive - to line receiver

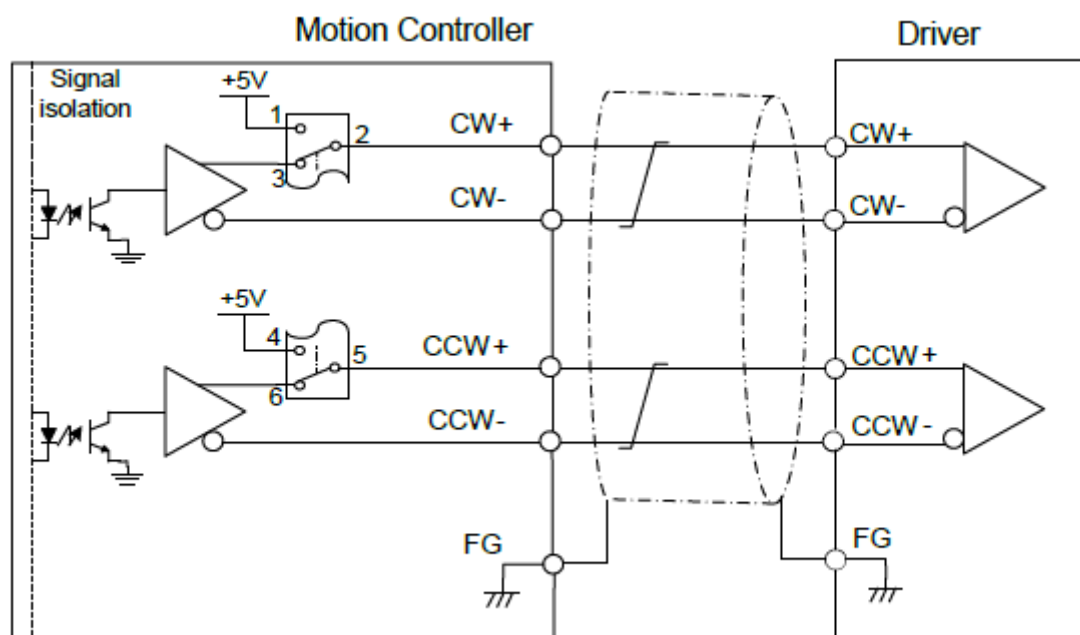


- CW/CCW Line Drive - to photo coupler

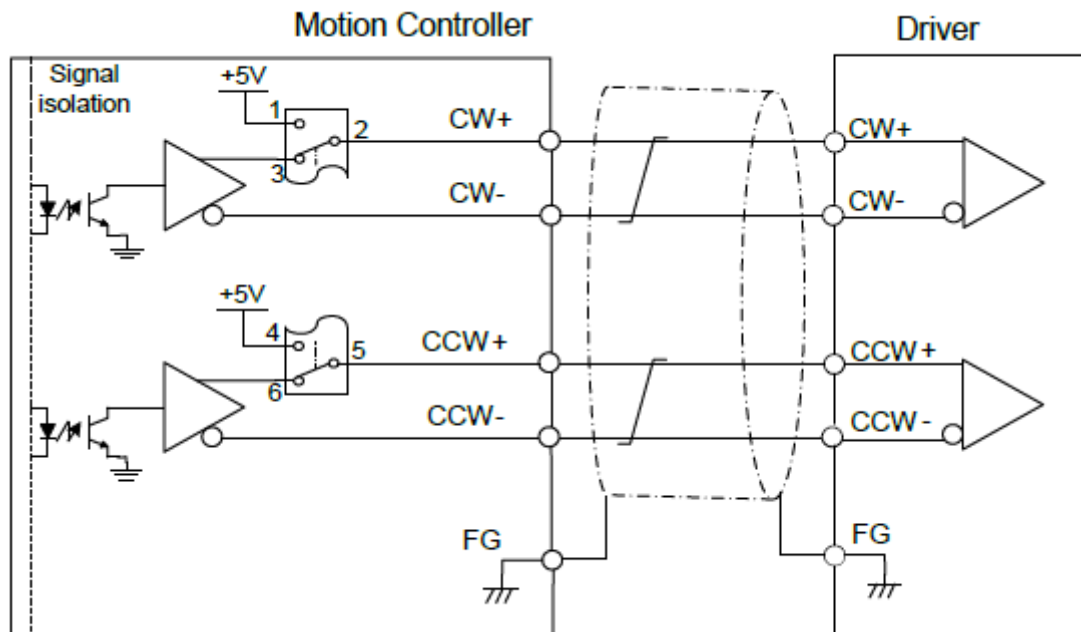

Open Collector

- Open Collector (AMP)
 , Shielded Twisted pair type .

- driver R open collector

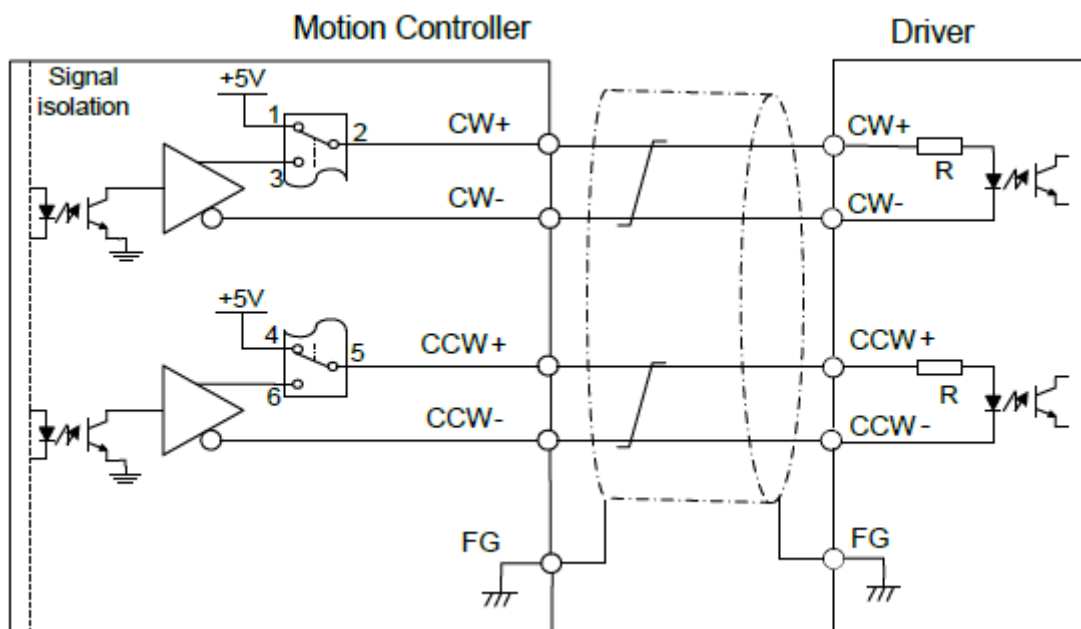

Feedback (EA, EB, EZ)

Info


- Feedback ,
- A B 가 , 90
가 UP/DOWN 가 가
- 1 1 Z
- Feedback
Feedback

Value	출력 형태	
	(+) 방향 운전 시	(-) 방향 운전 시
8	CW CCW	CW CCW
9	CW CCW	CW CCW


Encoder

- EA, EB, EZ 가
- EA, EB, EZ Phase-A, Phase-B, Index(Zero)-Pulse
- Z 가 , RPM
- Line Drive , Shielded Twisted pair type

- Encoder - Line Drive

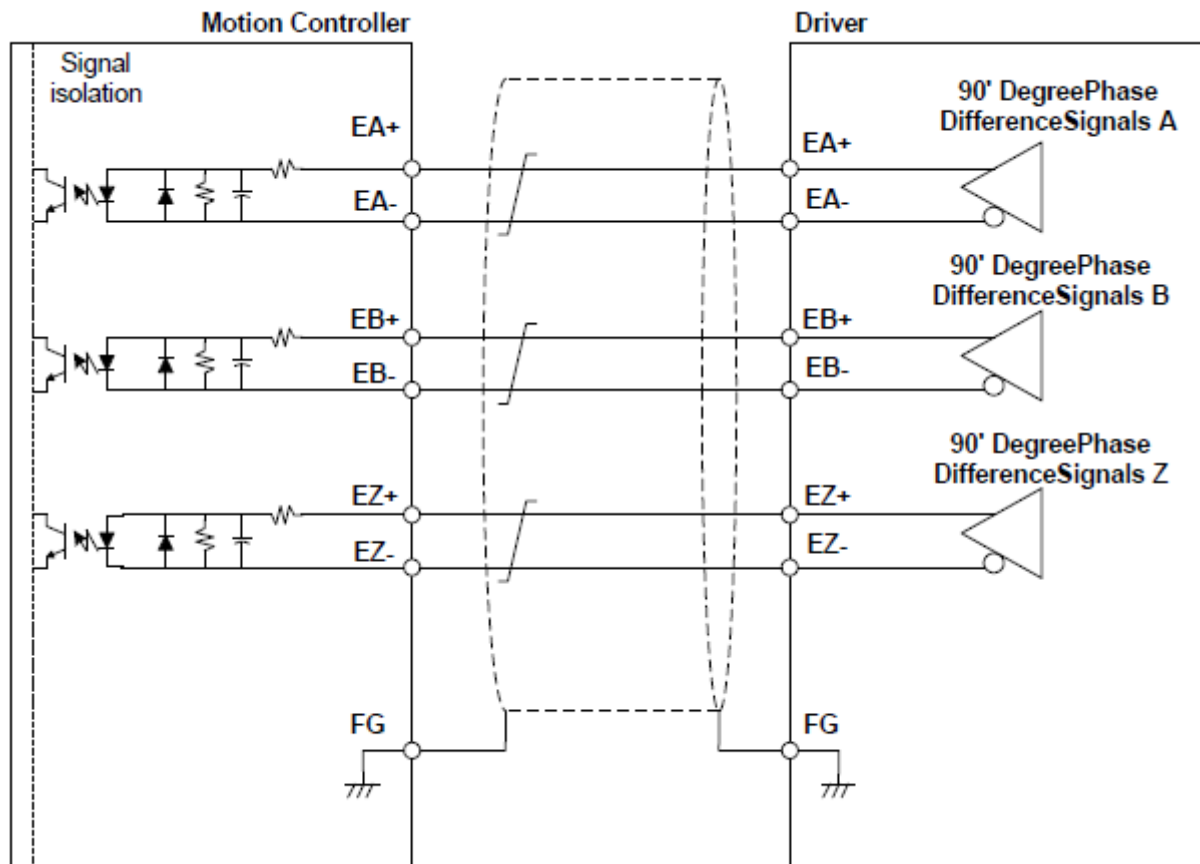

- Encoder - Open Collector

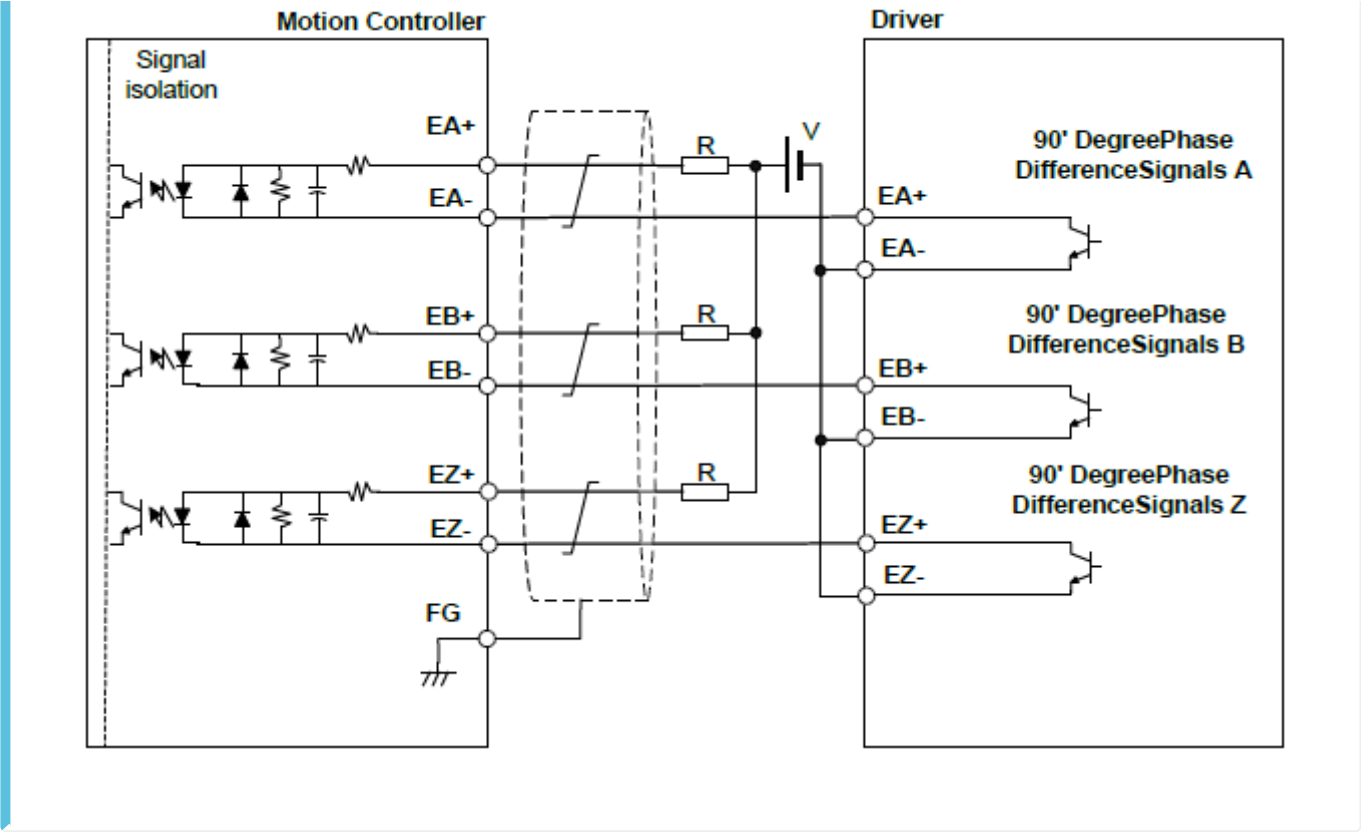

• 1)

외부 전원	외부 저항 R
+5V	1/4W, 100Ω
+12V	1/4W, 1KΩ
+24V	1/2W, 2.2KΩ

1)
IF = 10mA max

From:
<http://comizoa.co.kr/info/> - -

Permanent link:
http://comizoa.co.kr/info/doku.php?id=platform:pulse:info:interface:command_feedback&rev=1547183966

Last update: 2024/07/08 18:22