

CMP		1
		2
		3

×

CMP

• COMI-LX50x

1)

• CMP

○ Machine Vision

○ [(CMP)]

• CMP

Active High(Rising Edge)

Active Low(Falling Edge)

○ Active Low : ≤ 2 μs

○ Active High : ≤ 40 μs

○ **Active Low**

• CMP

NPN

Target System

Isolated

Input

Motion Controller측 회로

Target System 회로

CMP

TRG IN

GND

GND

CMP

GND

CMP


TRG IN

• Target System


TTL Input

Pull-up


-- <http://comizoa.co.kr/info/>

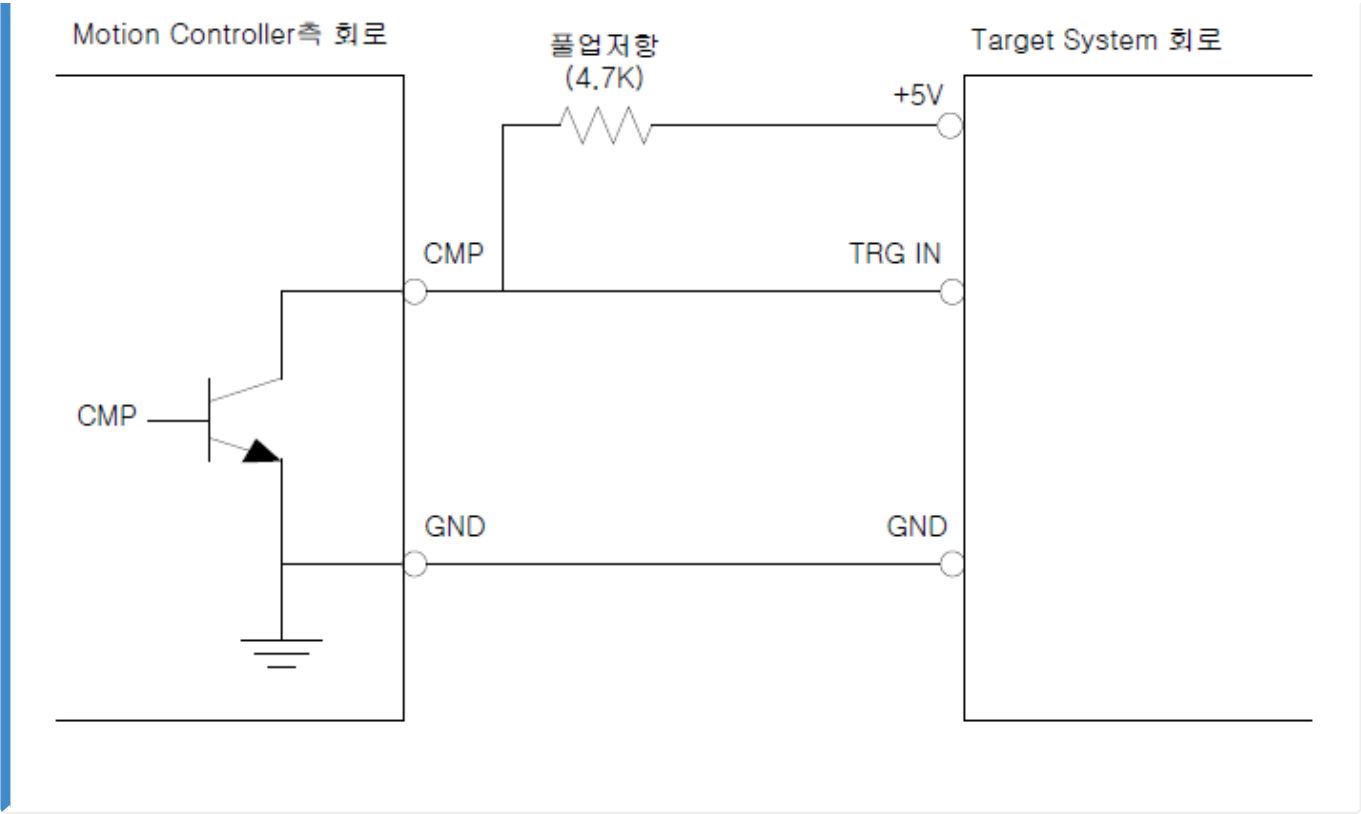

-
- Spec.
- Current sink Current source
- NPN Type Sensor

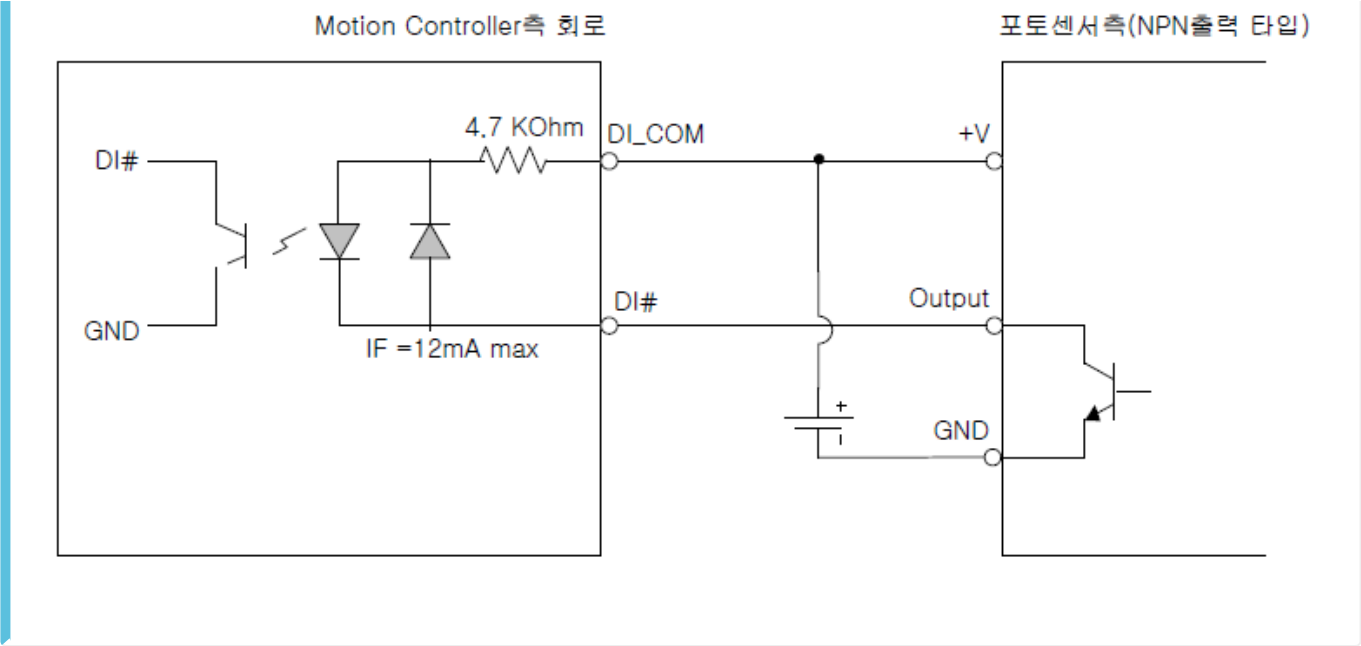

- PNP Type Sensor

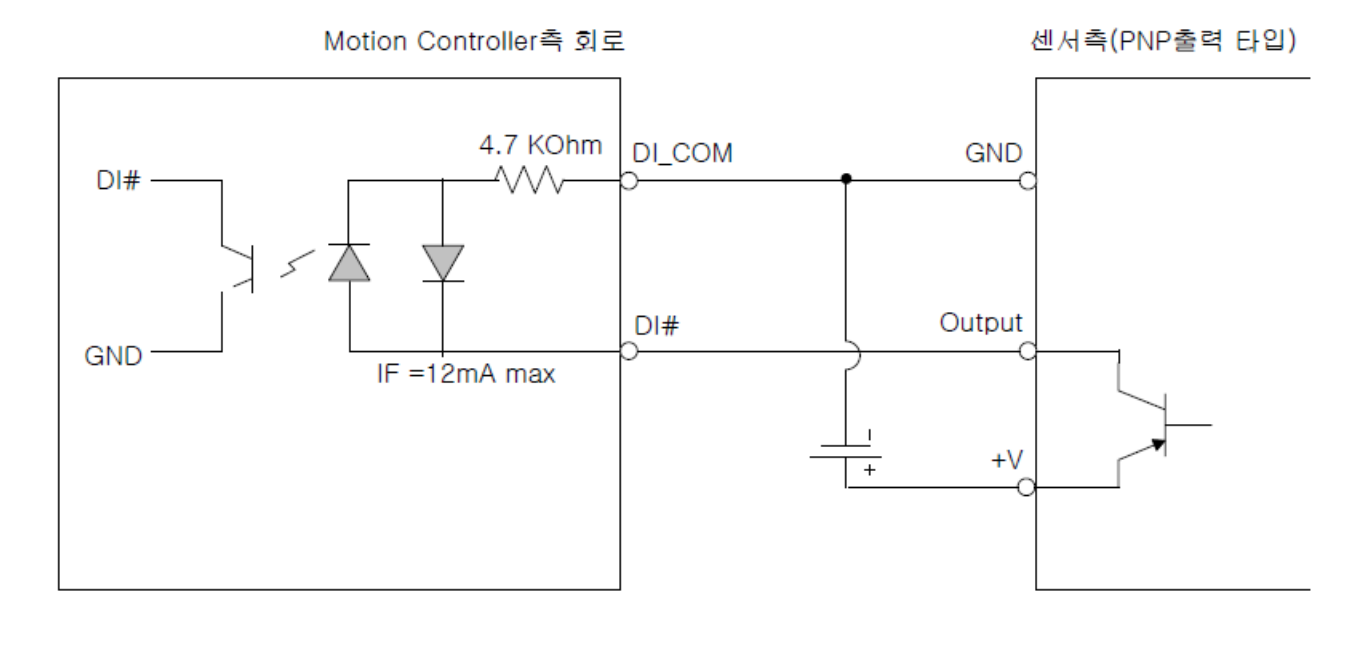


-

-

Spec.

- , “Common ground”
 - “ON” 가 (Sink current)가
 - , “OFF” 가 가
 - , (Inductance) 가 (Load)
DO_COM 2)

Motion Controller측 회로

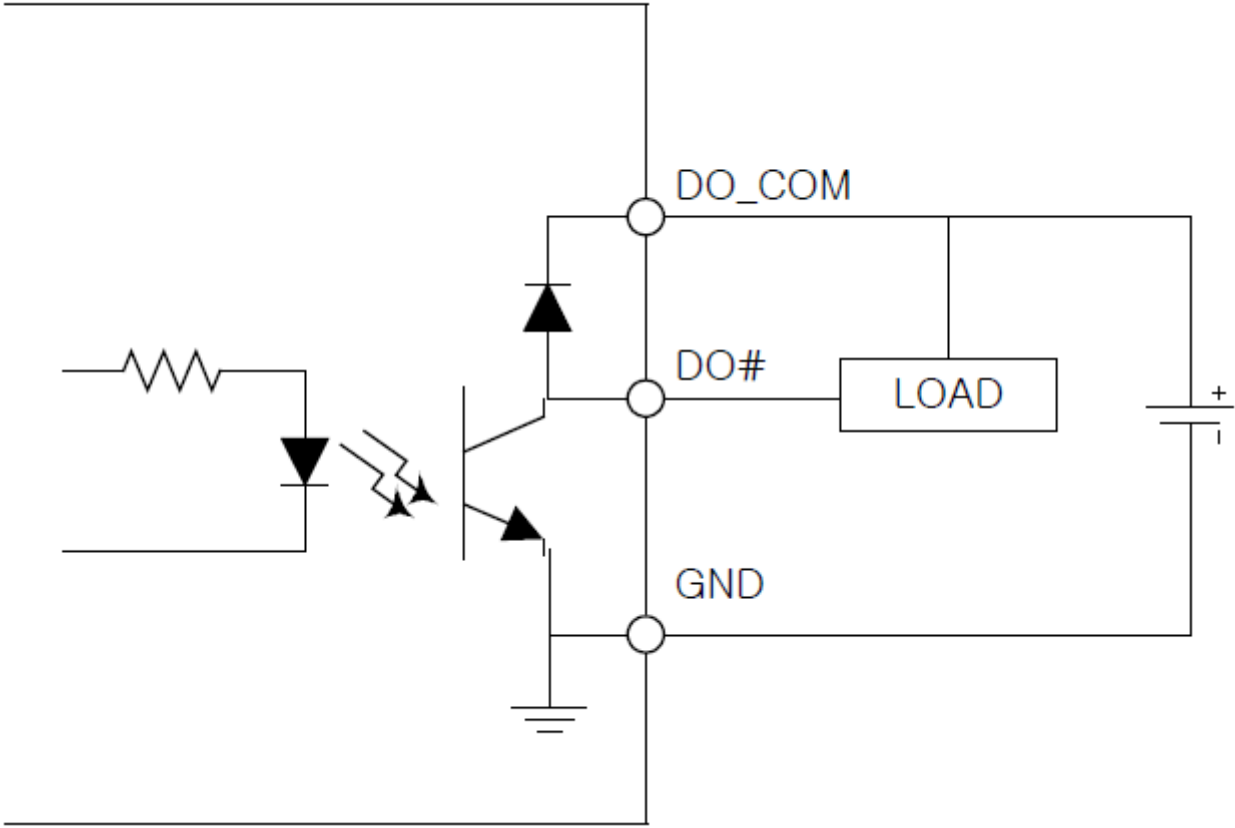

- (Sink current) 20mA

1)
Command counter Position Counter 가 CMP

2)
“Fly-wheel Diode” 가 “ON” “OFF”

From:

<http://comizoa.co.kr/info/> - -

Permanent link:

http://comizoa.co.kr/info/doku.php?id=platform:pulse:info:interface:signal_etc&rev=1547193019

Last update: **2024/07/08 18:22**