




# ECS-AO04VH-B10 | 4 Analog Output, 16bit, Voltage $\pm 10V$

## Outline Drawing

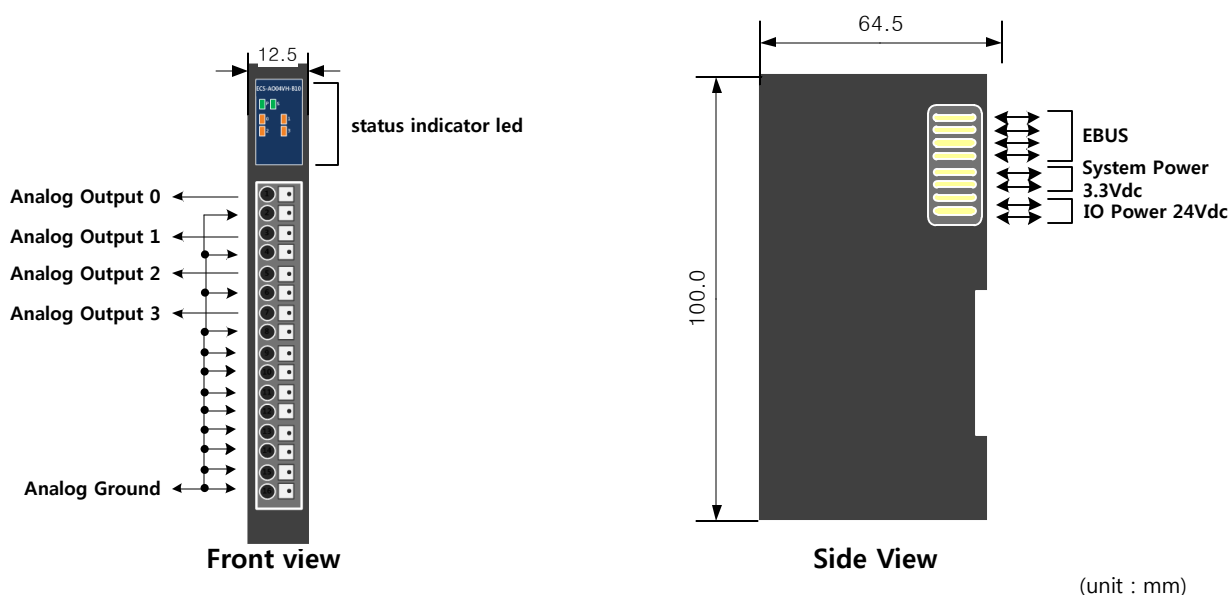

## Specification

### ■ Analog Specification

ITEM	ECS-AO04VH-B10
Number of Outputs	4 Output
Output type	Single Ended
Resolution	16bit(2's Compliment)
Voltage Output Range	$\pm 10$ DC
Isolation	Non-isolated Between Channels I/O to Logic : Photo Coupler isolation(3KV)
Error	Offset Error : $\pm 6$ mV Gain Error : $\pm 0.3$ %
Load Resistance	Min. 5K $\Omega$
Conversion Time	Min. 200us / All Channels
Wiring contact	LSF-SMT3.5-16P (Weidmuller)

### ■ Power Specification


ITEM	ECS-AO04VH-B10
Power Dissipation(System)	Max 100mA @ 5.0V DC
Power Dissipation(I/O)	Max 80mA @ 24.0V DC
Rated input voltage	24V DC (- 15%/+20%, ripple ratio within 5%) EN 61131-2

### ■ Environmental Specification


ITEM	ECS-AO04VH-B10
Dimension	65 * 100 * 12.5 (mm)
Install	Industrial DIN rail
Operating Temperature Range	0°C ~ 50°C
Storage Temperature Range	-20°C ~ 80°C
Operating Humidity Range	5% ~ 90%RH, non-condensing
Storage Humidity Range	5% ~ 90%RH, non-condensing

Wiring

Circuit Diagram

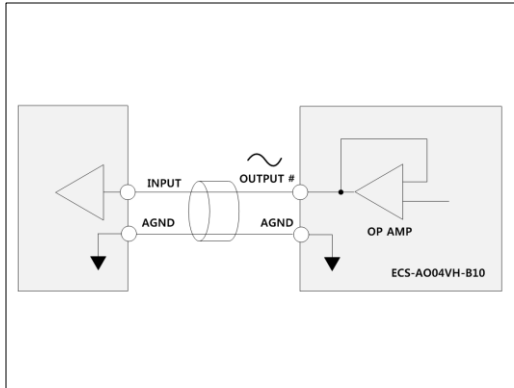


PIN MAP

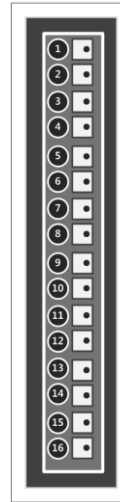

1	OUTPUT 0
2	AGND
3	OUTPUT 1
4	AGND
5	OUTPUT 2
6	AGND
7	OUTPUT 3
8	AGND
9	AGND
10	AGND
11	AGND
12	AGND
13	AGND
14	AGND
15	AGND
16	AGND

Indicators



P	SYSTEM POWER LED	ON	SYSTEM POWER(5V DC) ON
		OFF	SYSTEM POWER(5V DC) OFF
S	EtherCAT AL STATE LED	OFF	INIT
		Blinking(slow)	PRE-OP
		Single Flash	SAFE-OP
		ON	OP
		Flickering(fast)	BOOTSTRAP
0-3	INPUT STATE LED	ON	Analog Out State
		OFF	Power-Down State

Analog Data

